



Security. Made Pro.

Quick Start Guide

annke.com


Welcome to ANNKE!

Your security is our priority.
If you have any questions, please contact us
anytime, we'll get back to you in 24 hours.

 support@annke.com

 <http://help.annke.com>


1. What's in the Box



Battery Camera



Solar Panels



Solar Panels Bracket




Type-C Power Cable



Quick Start Guide




Surveillance Sign



Screw Pack

Note: The packing list is for reference only, please refer to the actual product.

2. Product Description

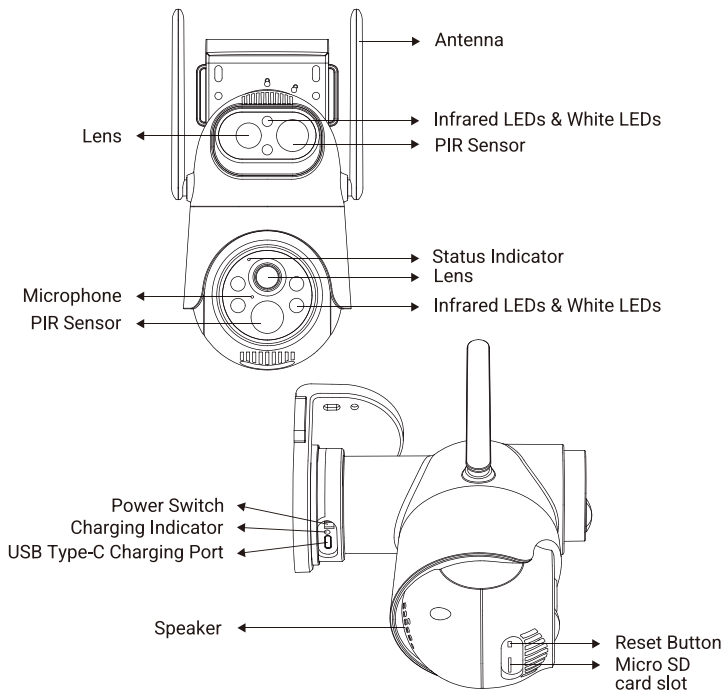

3. Download and install the APP


Download and install the free " **Annke Sight** " from the Google Play Store or App Store, create an account and login.

Note: Please allow the APP to obtain relevant permissions, such as Location, Bluetooth, Storage, Notification, Microphone, Speaker, etc. Otherwise, the device cannot be added normally, affecting your user experience.






4. Added camera to APP

Before adding a device:

1. Make sure your wireless router has DHCP enabled and has no restrictions on new devices accessing it.
2. The WiFi password should be no less than 8 characters, no more than 20 characters and no special characters..
3. Turn on the camera power switch, wait for the camera to start, the red indicator light starts flashing and a configure prompt sound is heard.




Click the " **Add smart Device** " or " **+** " icon, operate according to the prompts on the APP interface and complete adding the camera.

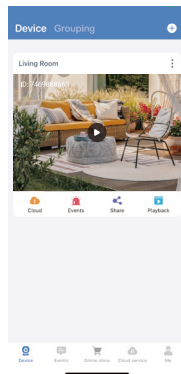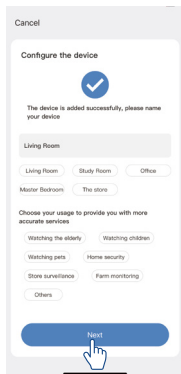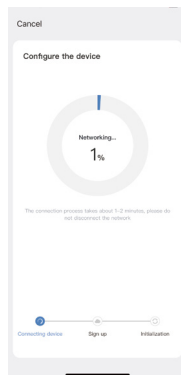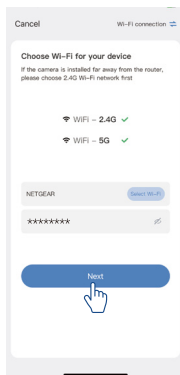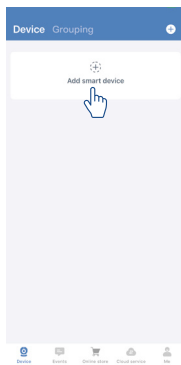




Note: If the camera fails to be added, please check the WiFi information and status, and reset the camera to restart and try again.

5. Micro SD card settings

1. Turn off the camera, open the waterproof cover at the bottom of the camera, find the Micro SD card slot, and insert the Micro SD card into the slot in the correct direction.

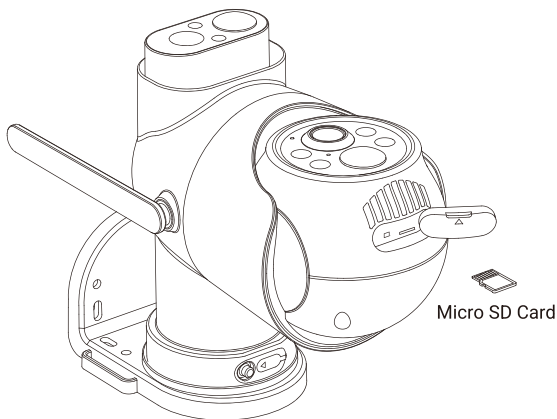



2. Turn on the camera, enter the APP preview interface, and enter the camera settings. You can check the micro SD card status and formatting in the storage settings.

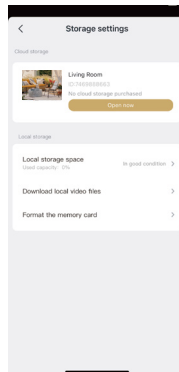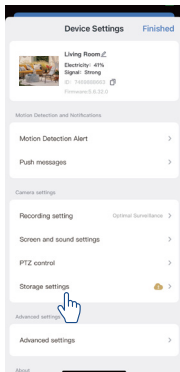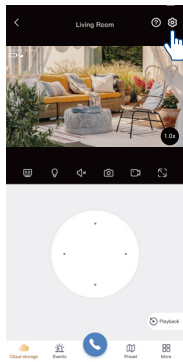

6. Added camera to Wireless NVR

Before adding a new camera, please make sure that the NVR has a free channel. Turn on the camera power switch and wait for the startup to complete.

Right-click the mouse and click[Camera], click [+] to make sure the new camera has been started normally, click[Continue] to enter the camera adding interface, the NVR will automatically search for and add the new camera nearby, and after it shows that it has been added successfully, click[Continue] to enter the Preview interface, and click[Continue] to exit.

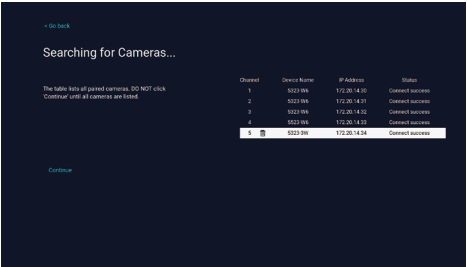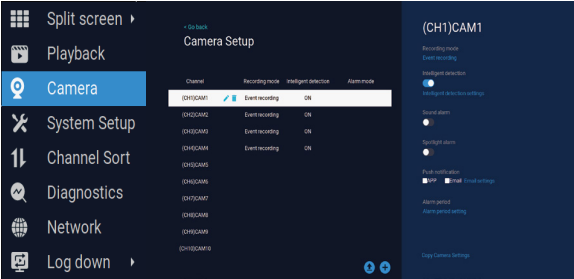



Note: If the camera cannot be found, reset the camera and try again.

7. Added camera to Touch Screen NVR

Before adding a new camera, please make sure that the NVR has a free channel. Turn on the camera power switch and wait for the startup to complete.

Press -[Match Code] -[Match Code] , the system automatically searches for and adds new cameras.


Note: If no video is displayed on the screen, please reset the camera and try again.

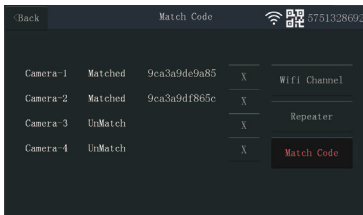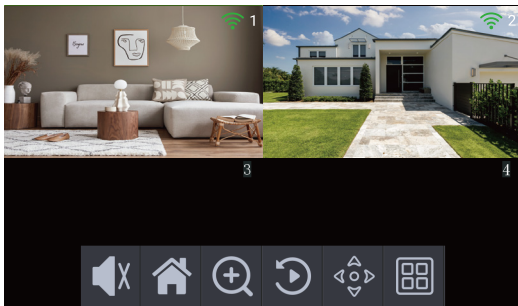

For more connection methods, please contact support@annke.com




8. Installation the Camera

- A. Confirm that the surface of the object on which the camera is mounted can withstand three times the weight of the camera and the bracket.
- B. Confirm that the WiFi signal at the camera location is stable.
- C. Choose a position 2 to 3 meters from the ground.
- D. Fix bracket to installation position.
- E. Mount the camera on the bracket.

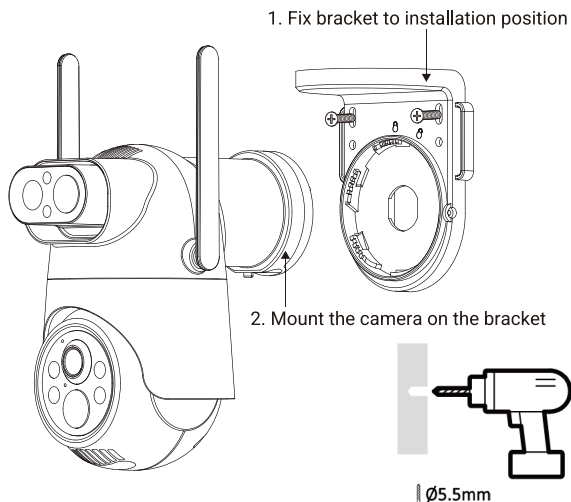

9. Installing and connecting solar panels

- A. Find a location that receives enough sunlight and is not shaded and at a suitable distance from the camera. (This distance depends on the length of the solar panel wire)
- B. Confirm that the surface of the mounting object can withstand 3 times the weight of the solar panels and brackets.
- C. Install the solar panel bracket and fix the solar panel to the bracket at a certain angle. The ideal angle between the solar panel and the horizontal direction is 45° . (The installation angle is the actual environment prevails)
- D. Remove the waterproof rubber plug from the camera's Type-C Power Port and plug the solar panel cable into the camera's Type-C Port.
- E. Please confirm that the solar panel is powering the camera. Launch APP. A charging icon can be seen on the APP when the solar panel is charging the camera.
- F. Maximize the charging efficiency of the solar panel. Regularly wipe the surface of the solar panel with a soft cloth to avoid the influence of dust and other coverings.

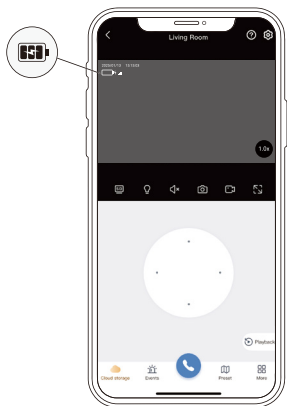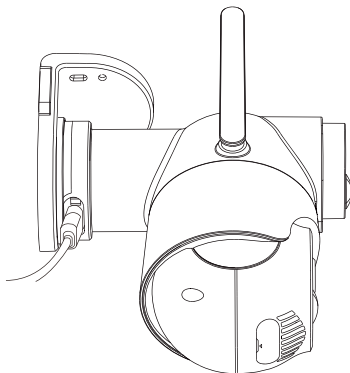



Manufacturer: Shenzhen Kean Digital Co., Ltd.


Address: Room 1001, Rujun Building, No. 105, Zhongxing Road, Ma'antang Community, Bantian Street, Longgang District, Shenzhen, 518129, China.

Email: support@annke.com

Help Center: help.annke.com



THEMIS AR support ltd
85 Great Portland St, London, United Kingdom, W1W 7LT
legal@themisar.com



THEMIS AR Unterstützung UG
Gumbertstraße 150, EG rechts, 40229 Düsseldorf, Deutschland
legal@themisar.com



Made in China